



# Framed Exhaust Mount (Luxe)

## Component Dimensions

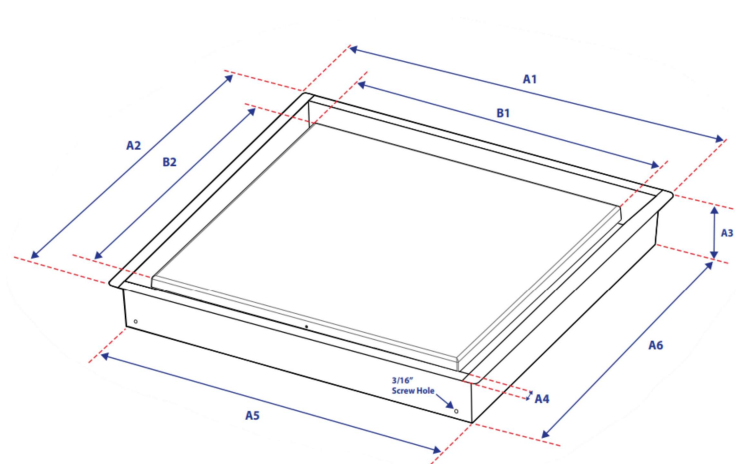

### Expanded View

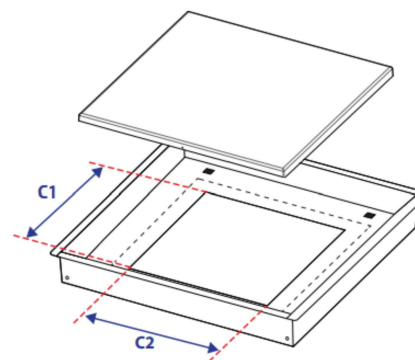

## Dimensions

|      | Imperial (in) | Metric (mm) |
|------|---------------|-------------|
| A1   | 15 25/64      | 391         |
| A2   | 15 25/64      | 391         |
| A3   | 1 23/32       | 44          |
| A4   | 39/64         | 15          |
| A5   | 14 1/4        | 362         |
| A6   | 14 1/4        | 362         |
| B1   | 13            | 330         |
| B2   | 13            | 330         |
| C1*  | 8             | 203         |
|      | 10 5/8        | 270         |
| C2 * | 8             | 203         |
|      | 10 5/8        | 270         |

## Additional Notes

### Components

**Body (A):** Framed edge for quick and easy drop-in installation. No mudding or sanding required.

**Tray (B):** Powder coated surface to be finished with paint or wallpaper to match ceiling. Can slide and remove to access fan.

### Air Flow Control

No airflow control available for this model

### Compatible Fans

Compatible with any retrofit fan models that require drywall opening between 8x8" to 10 1/2" x 10 1/2". Installation requires extra 1 3/4" space in ceiling cavity. See Figure 1.1

Notable compatible fans are: Panasonic - WhisperCeiling, WhisperFit, WhisperGreen Select





Figure 1.1

### Install Note

Some fans may require trimming the mounting flange. C1 and C2 can be trimmed to 8 - 10 5/8" to fit various fans. Double check before mounting by dry-fitting fan into Drywall Pro X opening. Test by sliding Drywall Pro X plate in the tabs - if the fan's flange obstructs the tabs, trim flange as needed.

## Flush Exhaust Mount (Luxe)

### Component Dimensions

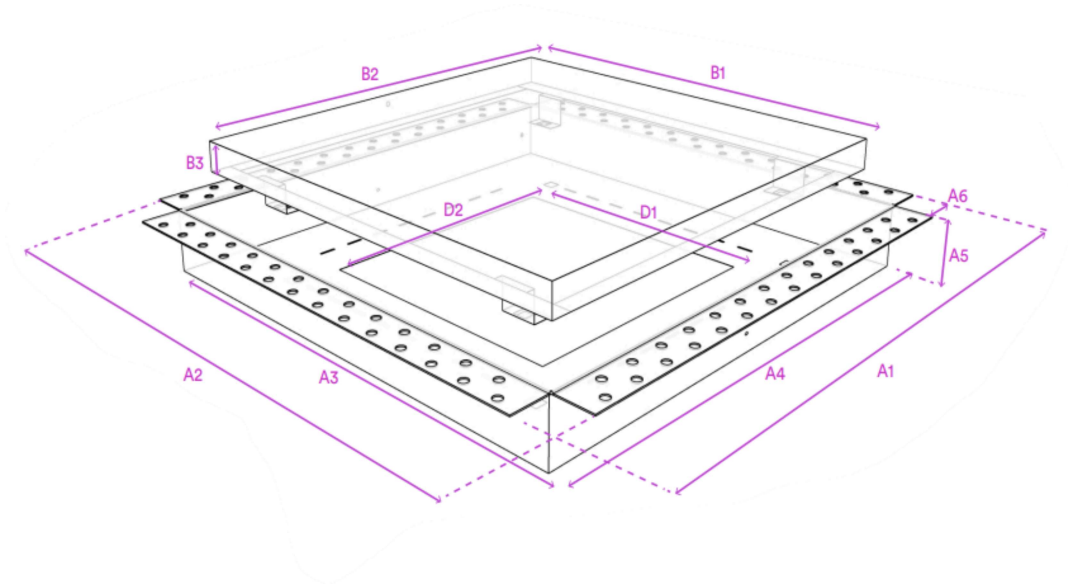

### Dimensions

|      | Imperial (in) | Metric (mm) |
|------|---------------|-------------|
| A1   | 16 11/16      | 424         |
| A2   | 16 11/16      | 424         |
| A3   | 14 1/4        | 362         |
| A4   | 14 1/4        | 362         |
| A5   | 1 11/16       | 43          |
| A6   | 1 1/4         | 32          |
| B1   | 13            | 330         |
| B2   | 13            | 330         |
| B3   | 7/8           | 22          |
| D1*  | 8             | 203         |
|      | 10 5/8        | 270         |
| D2 * | 8             | 203         |
|      | 10 5/8        | 270         |

#### \* Install Note

Some fans may require trimming the mounting flange. D1 and D2 can be trimmed to 8 - 10 5/8" to fit various fans. Double check before mounting by dry-fitting fan into Drywall Pro X opening. Test by sliding Drywall Pro X plate in the tabs - if the fan's flange obstructs the tabs, trim flange as needed.

### Additional Notes

#### Components

**Body (A):** Framed Edge for quick and easy drop-in installation. No mudding or sanding required.

**Tray (B):** Powder coated surface to be finished with paint or wallpaper to match ceiling. Can slide and remove to access fan.

#### Air Flow Control

No airflow control available for this model

#### Compatible Fans

Compatible with any retrofit fan models that require drywall opening between 8x8" to 10 1/2" x 10 1/2"

Installation requires extra 1 3/4" space in ceiling cavity. See Figure 1.1

Notable compatible fans are: Panasonic - WhisperCeiling, WhisperFit, WhisperGreen Select




Figure 1.1